


## WATERPROOF LUMINAIRES



RG 0/1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IK10	IP69K	CE EN 60598-1
--------	----------------	------------	-------	-----------------------	------	-------	------------------



...total protection against dust and water penetration during prolonged immersion, can be cleaned with pressure jets.

### MECHANICAL PARAMETERS

Housing: borosilicate glass, aluminium, polycarbonate, stainless steel

Shock resistance: IK10

Ingress protection: IP69

Mounting/ accessories: stainless steel clamps, steel cable suspension, pole adapter

### WORK PARAMETERS

Ambient temperature: -20°C to +40°C

Power: min 13W, max 40W

Lifetime: 70.000h L80 B50


Illumination technology: LED

### PHOTOMETRICAL PARAMETERS

CRI: >80

DALI	EMERGENCY 1h/3h
------	--------------------

## DIMENSIONS

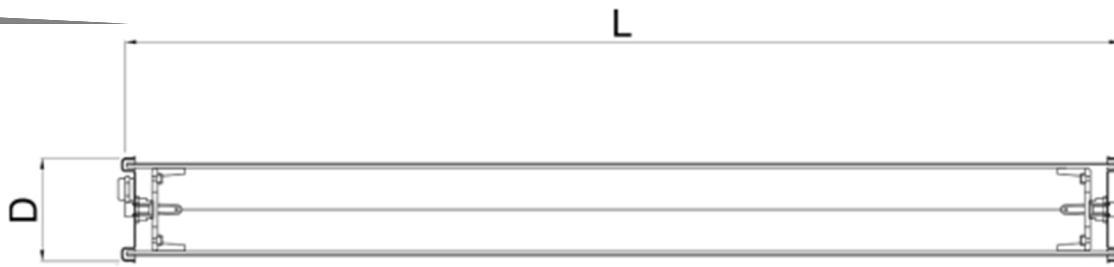

Size	Power	Gross output	Net output	T <sup>a</sup> colour	L	D	D + clamp	Packaging
(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
600	13	1.490	997	3.000	763	100	120	1
600	13	1.550	1.037	4.000	763	100	120	1
600	18	2.427	1.626	3.000	763	100	120	1
600	18	2.558	1.714	4.000	763	100	120	1
1200	24	2.980	1.993	3.000	1.375	100	120	1
1200	24	3.200	2.140	4.000	1.375	100	120	1
1200	36	4.854	3.252	3.000	1.375	100	120	1
1200	36	5.116	3.428	4.000	1.375	100	120	1
1500	29	3.720	2.488	3.000	1.660	100	120	1
1500	29	4.000	2.675	4.000	1.660	100	120	1
1500	45	6.067	4.065	3.000	1.660	100	120	1
1500	45	6.395	4.285	4.000	1.660	100	120	1

## PHOTOMETRY

