



## TUNNEL LIGHT FITTINGS



EN-60658-2-22 CERTIFICATE:

CNBOP no. 4378/2021



### MECHANICAL PARAMETERS

Housing: stainless steel  
Diffuser: tempered glass  
Protection level: IP65  
Protection class: I  
Mountings: 4 holes

### OTHER


Lifetime: 70.000h L80 B10  
Ambient temperature: -25°C to +45°C

### ELECTRICAL PARAMETERS

Source of light: LED modules with  
ENEC certificate  
Voltage: 230V 0/50-60Hz | 230VDC  
Cable glands: max 4 x M32  
Connection terminals: 4mm<sup>2</sup>  
Overvoltage protection: 1kV  
Control system: integrated DALI  
driver



## DIMENSIONS

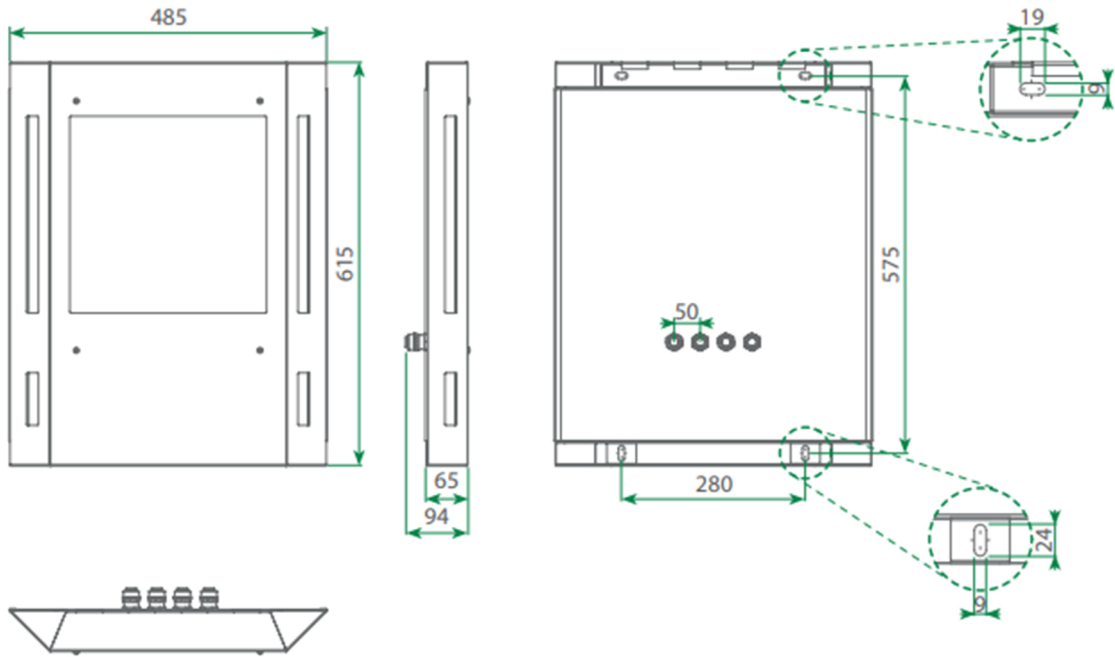

## TYPES COMPARISON



V1 - variant with additional illumination of the evacuating route.



V2 - basic illumination variant.

### TYPES

| TYPE              | LUMINANCE [cd/m <sup>2</sup> ] | ADDITIONAL LUMINOUS FLUX [lm] | POWER [W] | AMB. TEMP. [°C] |
|-------------------|--------------------------------|-------------------------------|-----------|-----------------|
| TNL300LED-0300-V1 | >200                           | 645                           | 18,5+8    | -25 ÷ +45       |
| TNL300LED-0300-V2 | >200                           | nie dotyczy                   | 18,5      | -25 ÷ +45       |

## OPTIONAL VERSIONS



**Exemplary configuration:**  
pictogram - emergency telephone.

CUSTOMISED PICTOGRAMS

ADDRESS MODULE

HOUSING MADE OF STEEL TYPE 304

HOUSING MADE OF STEEL TYPE 316

HOUSING MADE OF STEEL TYPE 316 TI

## SAMPLE PICTOGRAMS



## PHOTOMETRY

