
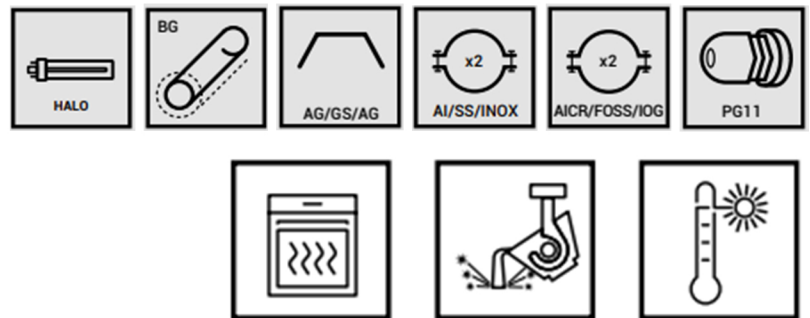


## WATERPROOF LUMINAIRES

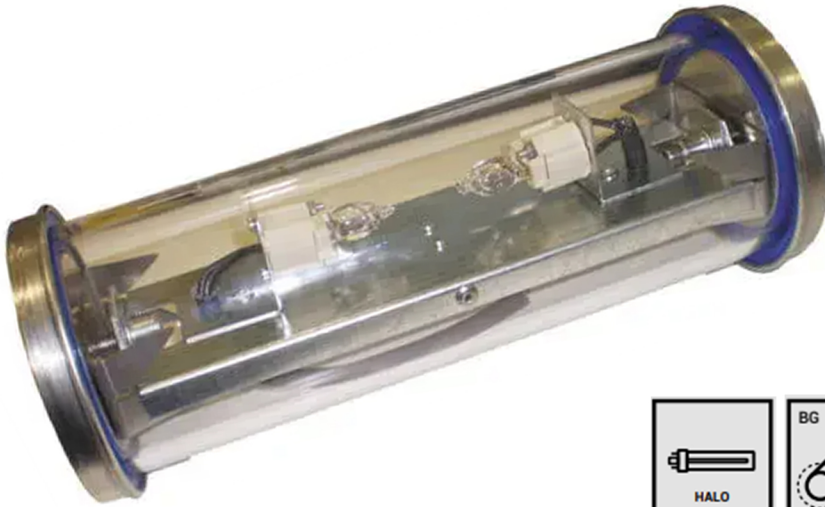

...tubular, rugged, water-resistant, high-temperature,  
for extreme conditions.

### MECHANICAL PARAMETERS

Housing: 5mm thick borosilicate glass  
Internal structure: galvanised steel frame  
Shock resistance: IK07  
Ingress protection: IP68  
Mounting/ accessories: 2 rapid stainless steel clamps

### WORK PARAMETERS


Ambient temperatures: -50°C to +200°C  
Power: min 40W, max 80W

### ELECTRICAL PARAMETERS

Input voltage: 220-240V, 50-60Hz  
0.06-0.7 A.  
Cable glands: metal  
Lamps: 2 G9 halogen lamps for ovens  
up to 40W.



## DIMENSIONS

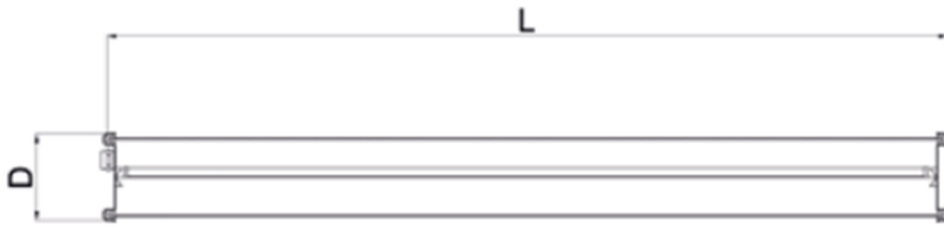

Watts	L	D	D + clamp	Packaging
(W)	(mm)	(mm)	(mm)	
1x40	275	105	140	1
2x40	275	105	140	1