


## VANDALPROOF LUMINAIRES

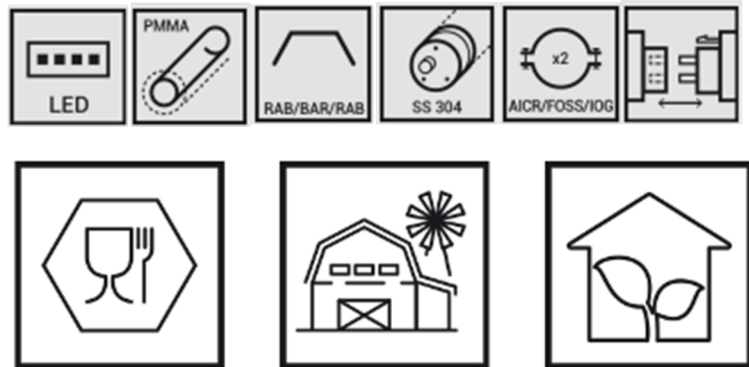

### MECHANICAL PARAMETERS


Housing: polycarbonate, PMMA  
 Diffuser: polycarbonate tubular  
 Shock resistance: IK10  
 Ingress protection: IP69  
 Mounting/ accessories: steel cable suspension, stainless steel clamps, stainless steel end caps, antivandalic acrylic

### OTHER


Ambient temperature: up to 80°C (high temperature version)  
 Lifetime: 50,000h L70 B50  
 72,000h L70 B50- optionally

### PHOTOMETRICAL PARAMETERS

CRI: >80  
 UGR: <19  
 CERTIFICATION: CE  
 COLOUR TEMPERATURE: 3000K, 4000K  
 -standard  
 5000K-optionally

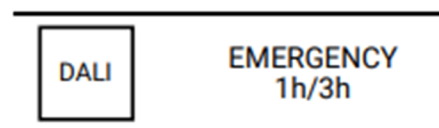

## DIMENSIONS

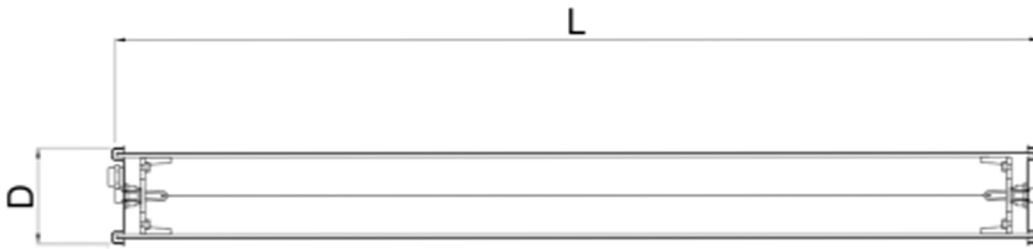

Dimensions	Power	Gross output	Net output	T <sup>3</sup> colour	L	D	D + clamp	Packaging
(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
600	13	1.490	1.155	3.000	763	100	120	1
600	13	1.550	1.201	4.000	763	100	120	1
600	16	2.560	1.984	3.000	763	100	120	1
600	16	2.670	2.070	4.000	763	100	120	1
1200	24	2.980	2.310	3.000	1.375	100	120	1
1200	24	3.200	2.480	4.000	1.375	100	120	1
1200	32	5.120	3.969	3.000	1.375	100	120	1
1200	32	5.340	4.139	4.000	1.375	100	120	1
1500	29	3.720	2.883	3.000	1.660	100	120	1
1500	29	4.000	3.100	4.000	1.660	100	120	1
1500	40	6.310	4.891	3.000	1.660	100	120	1
1500	40	6.700	5.193	4.000	1.660	100	120	1

## HIGH TEMPERATURE VERSION

Light source Size Dimension	Power	Gross output	Net output	T <sup>a</sup> colour	L	D	D + clamp	Packaging
(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
560	17	2.224	1650	5.000	763	100	120	1
1120	34	4448	3300	5.000	1.375	100	120	1
1400	43	5560	4125	5.000	1.660	100	120	1

## PHOTOMETRY

