


# Haz-Pro SMART-EX1

With a wide range of options for ATEX projects



## Benefits

- Suitable for environments up to 40°C, even outdoors.
- Compliant with gas groups IIA, IIB, IIC, due to its reduced MESH, making it perfect for almost all ATEX environments.
- DALI dimmable to optimize the use of light and save energy.
- Intelligent wireless control available.

## Characteristics



### Mechanical characteristics


Profile	UV resistant polycarbonate 5 mm thickness
End caps	Aluminium alloy, yellow RAL 1003
Gasket	Nitrile Butadiene Rubber (NBR)
Gear tray	White laquered steel plate
Cable entry	2 entries of 3/4 NPT for cable gland (not included)
Fixing clips	See Accessories

### Electrical characteristics

Connection	3/5 pole push wire terminal block
THD	< 10% full load

### Photometrical characteristics

SDCM	< 3
------	-----



### Functional characteristics

Lifetime	L80B50 50,000 hours at 25°C
Guarantee	5 years
Fire protection	Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°



**Ex II 2G Ex db IIC T6 Gb**  
**Ex II 2D Ex tb IIIC T85 Db**

# Haz-Pro SMART-EX1



FAMILY	LENGHT (mm)	LUMINOUS FLUX (lm)	CRI	LIGHT COLOUR (K)	DRIVER	PROFILE	THROUGH WIRING	EMERGENCY KIT	END CAPS COLOUR
> KRATEX HE	> 600 > 1200	> 20: ~ 2500 > 100: ~ 11000	> 8: >80	> 40: 4000	> ET: non-dimmable	> PC: polycarbonate	> 3x2.5mm <sup>2</sup>	> EB3: 3 hours	> 7035: grey RAL 7035

Special options under request

Ask our Sales Team for more details

> 65: 6500K





> \_: yellow RAL 7035

## Operational data


Description	Order number	Luminous flux (lm)	Power (W)	Efficiency (lm/W)	Emergency luminous flux (lm)	Colour temperature (K)	CRI
Haz-Pro SMART-EX1 600 20-840 ET PC 7035	10249097	2500	20	125	-	4000	> 80
Haz-Pro SMART-EX1 1200 100-840 ET PC EB3 7035	tbc	-	80	140	750	4000	> 80
Haz-Pro SMART-EX1 1200 100-840 ET PC 7035	10249113	11000	80	140	-	4000	> 80

<sup>1</sup> In emergency versions maximum power consumption increases in 4W during battery charging, which is approximately 5% of the time that luminaire is on. The rest of the time power consumption is as indicated.

## Dimensions and logistics

Description	X	Xm	Y	Z					
	mm	mm	mm	mm	L x W x H mm	Pcs./Box	Box <sup>2</sup>	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
Haz-Pro SMART-EX1 600...	750	640	157	197	780 x 240 x 180	1	5.9	48	32 + 32
Haz-Pro SMART-EX1 1200...	1360	1250	157	197	1390 x 240 x 180	1	11.2	24	16 + 16

<sup>2</sup> Weight in EB versions: +0.6KG and in 3x2.5 versions: +0.1KG  
Please check with our Back Office to confirm logistic data

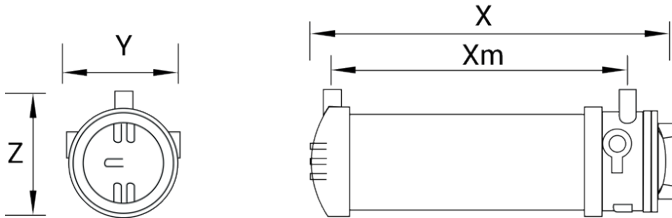

## Accessories

10078101	Eye bolts, 2 units
10078102	Fixing omegas, 2 units
10078104	Brass double-sealed EX cable gland seals for armoured cable 3/4 NPT, 1 unit



10078101



10078102



10078104



+44 151 422 0184  
sales@hazlite.com  
Tanhouse Lane, Widnes,  
WA8 0ZA, UK