



Hazardous
Lighting Solutions LTD



INV320LED- RC-LN

LED modules light fixture characterised by very high shock resistance (IK11+)




TYPES COMPARISON

TYPES	L [mm]	L1 [mm]	L2 [mm]	B [mm]	B1 [mm]	B2 [mm]	H [mm]
INP320LED-0600-...-RC	740	680	380	180	105	150	105
INP320LED-1200-...-RC	1370	1310	780	180	105	150	105



MAXIMUM QUANTITY OF LIGHT FIXTURES CONNECTED IN SERIES FOR SPECIFIC CIRCUIT BREAKER

AUTOMATIC CIRCUIT BREAKER TYPE	C16	C20	B16	B20	B20
INV320LED-0600-J2	26	35	16	21	21
INV320LED-0600-B2	20	25	12	15	15
INV320LED-1200-J4	20	25	12	15	15
INV320LED-1200-B4	16	22	8	11	11
INV320LED-1500-J4M2	20	25	12	15	15

MOUNTING

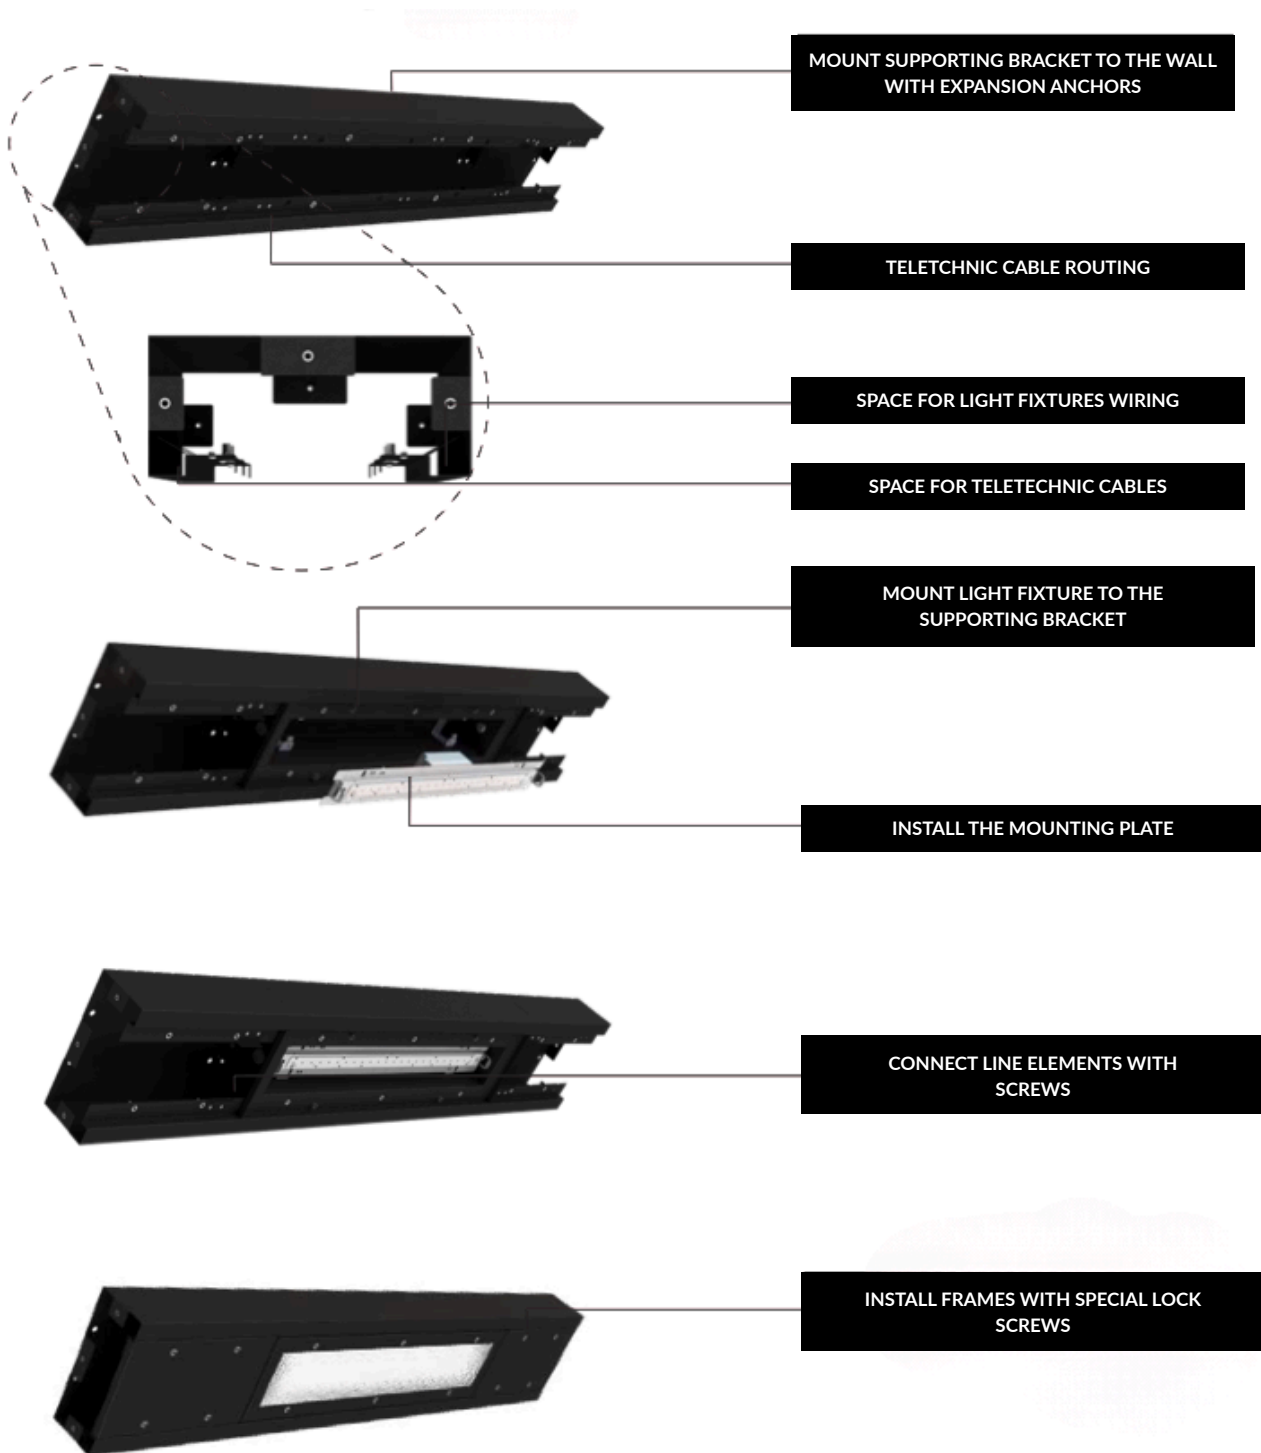

DIMENSIONS

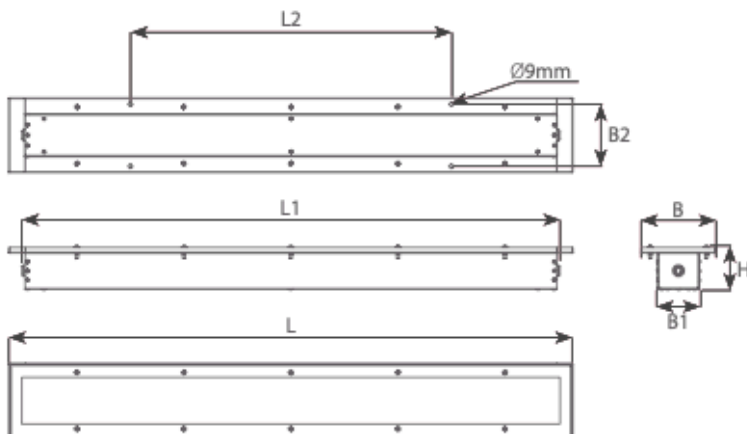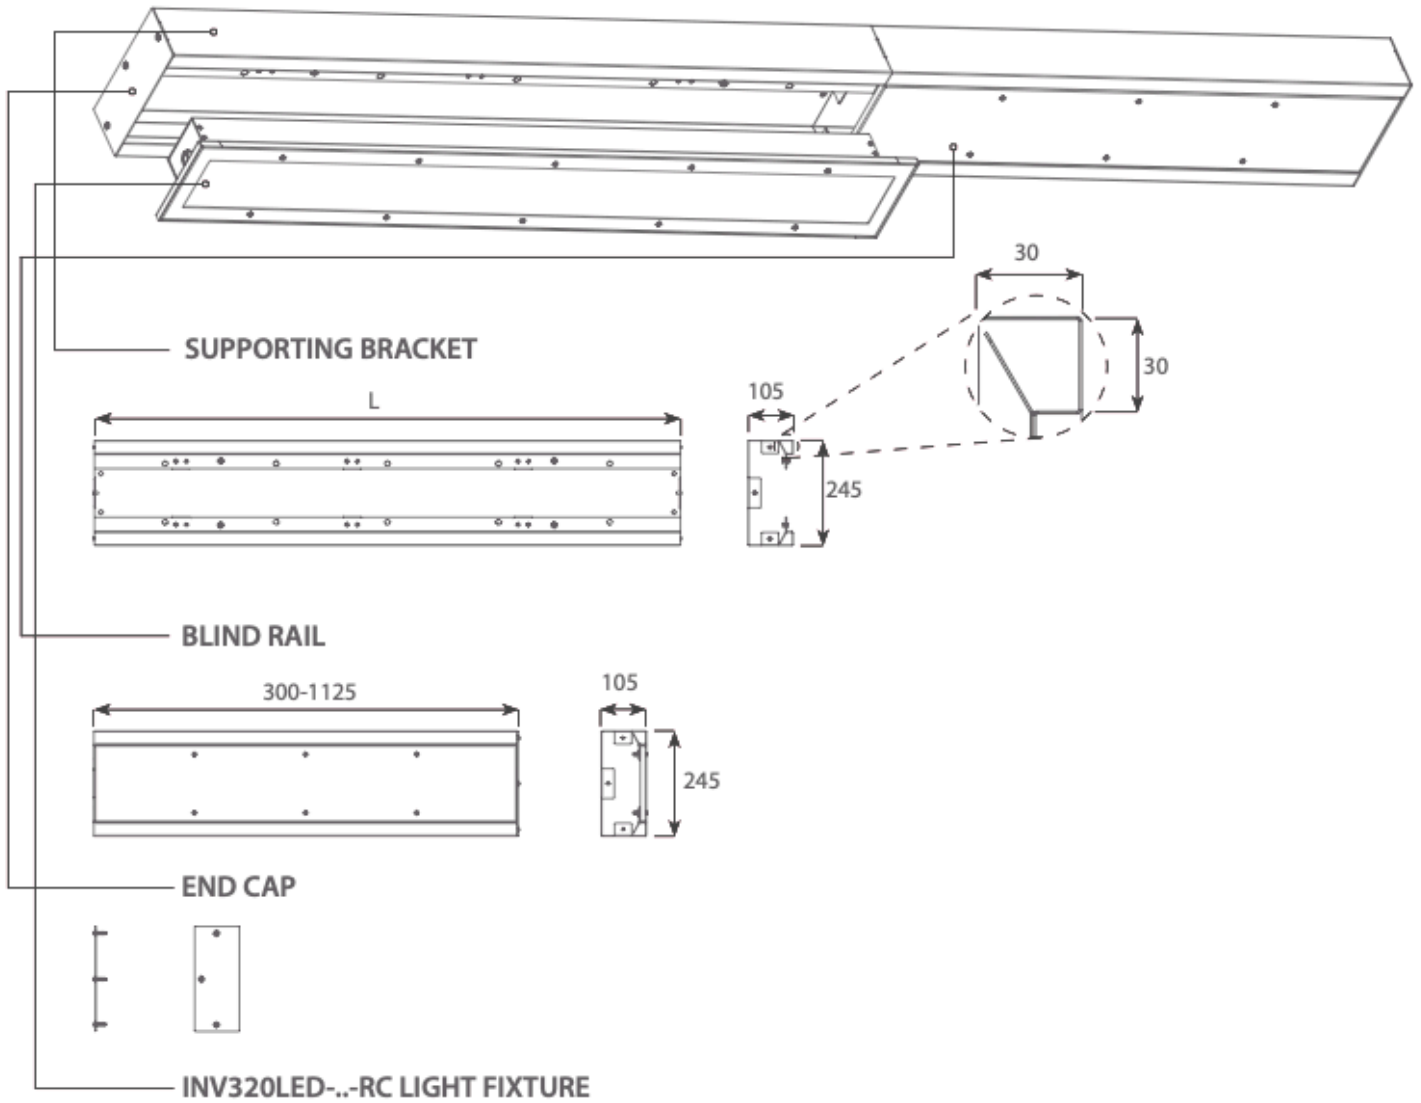

OPTIONAL VERSIONS



INV320LED-...-LNC (CONNECTOR)

Vandalproof corner connector with possibility to adjust shape and size to ensure the continuity of the LINE system. Connector is mounted directly to the housing of adjacent modules. Made of stainless steel. Entire LINE modular system is equipped with locks to prevent unauthorized access.



INV320LED-...-LNP (BLIND PLUG)

Made of stainless steel, vandalproof, empty casing (blind plug) acting as a distance between light fixtures. Available in various lengths. Designed for corner mounting as one of the LINE system modules. Behind the housing there is a free space for routing cables.



INV320LED-...-LNS (SENSORBOX)

Made of stainless steel, vandal-proof housing designed for placing cameras, speakers, sensors or other devices in it. It is also possible to mount sensors directly inside the light fixture. Housing is designed for corner mounting as one of the LINE system modules.